



CTD Data RV Heincke HE454

Data Processing Report

Contents

1	Introduction	1
2	Workflow	1
3	Cruise details	3
4	Sensor Layout	3
5	Processing	3
6	Results	5

Contact:

Gerd Rohardt

Alfred-Wegener-Institute

Am Handelshafen 12, D-27570 Bremerhaven, GERMANY

Mail: info@awi.de

Processing Agency:

FIELAX

Schleusenstr. 14, D-27568 Bremerhaven, GERMANY

Mail: info@fielax.de

Ref.: CTD-HE454-report.pdf	Vers.: 1	Date: 2016/04/07	Status: final
----------------------------	----------	------------------	---------------



1 Introduction

This report describes the processing of CTD raw data acquired by Seabird SBE 911plus CTD on board RV Heincke during expedition HE454.

2 Workflow

The different steps of processing and validation are visualized in Figure 1. The CTD raw data are delivered from Gerd Rohardt (AWI). The station book of the RV Heincke cruise is extracted from the DAVIS SHIP data base (https://dship.awi.de). The first CTD station and cast is processed manually in SBE Data Processing to configure the *.psa Seabird routines Data Conversion, Wild Edit, Bottle Summary, Split, Translate, Cell Thermal Mass, Loop Edit and Bin Average. The Seabird routines are then run in a batch job CTDjob in ManageCTD to process the complete CTD data set. The downcast of each CTD station/cast is used for further processing. In CTDjob the start record and the lowest altimeter point of the downcast is selected. With the *Utilities* → *Dship Ebook* function of ManageCTD the DAVIS SHIP station book extraction is used for getting the header information of all CTD stations/casts of the cruise. ManageCTD *Utilities* \rightarrow *Find Profile* function compares station times of the header with the entries in the station book to find out the correct naming of the stations and casts. In CTDheader in ManageCTD the header information of each CTD station/cast is displayed, controlled and corrected if necessary. CTDdespike in ManageCTD is used for a visual check of the data and to erase/interpolate spikes in the data if necessary. Additionally, a sensor pair (Temp1/Sal1 or Temp2/Sal2) is chosen for each station/cast of the RV Heincke cruise in CTDdespike.

ManageCTD *Utilities* \rightarrow *CheckDoubleSensors* controls the quality of temperature and conductivity sensors. For this purpose outliers of too high sensor pair differences could be removed. The data is then converted to spreadsheet format with dsp2odv for visualization of the data in Ocean Data View (ODV). The second visual inspection of the CTD data allows a comparison with data from other CTD casts from close-by stations to verify the oxygen sensor data. Therefore, potential reference cruise data is downloaded from PANGAEA (http://www.PANGAEA.de). The reference data is converted to *.mat format. In the ManageCTD Final Processing the CTD data is displayed together with the reference data. Bad data points, sensors or casts are interpolated or erased from the data set and filters are applied if necessary. The processed CTD data are written to text files and imported to PANGAEA (http://www.PANGAEA.de) for publication.



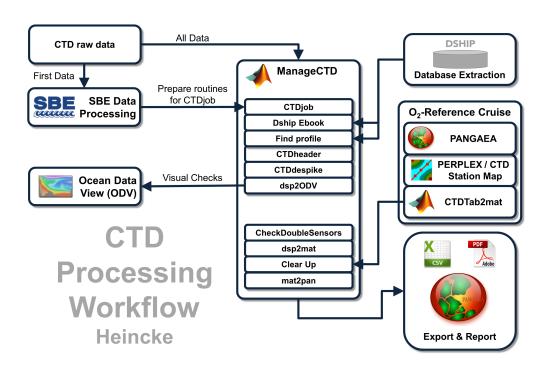


Figure 1: CTD data Processing Workflow



3 Cruise details

Vessel name RV Heincke

Cruise name HE454

Cruise start 05.11.2015 Bremerhaven
Cruise end 17.11.2015 Bremerhaven

Cruise duration 13 days

No. of CTD casts 29

4 Sensor Layout

This chapter describes the CTD sensors mounted during this cruise: SBE 911plus CTD (SN: 1015), SBE Instrument Configuration Version 7.23.0.1.

ID	Sensor Name	Serial No.	Calibration Date
55	TemperatureSensor	5354	21-Jan-12
3	ConductivitySensor	2470	15-Nov-13
45	PressureSensor	1015	05-Oct-10
55	TemperatureSensor	5375	21-Jan-12
3	ConductivitySensor	3810	08-Feb-12
0	AltimeterSensor	46466	23-Mar-09
71	WET_LabsCStar	1348DR	13-Oct-2010
20	FluoroWetlabECO_AFL_FL_Sensor	1346	26-Feb-2009
38	OxygenSensor	1597	19-Jun-12

5 Processing

Details of processing procedures and processing parameters are described in *CTD Processing Log-book of RV Heincke* (hdl:10013/epic.47427).

Density Inversions and Manual Validation

Obvius outliers were removed manually. For the visual check density inversions > 0.005 kg/m^3 and > 0.01 kg/m^3 were flagged differently for display but removed automatically. Decisions whether the flagged values were manually removed or not are based on the description in *CTD Processing Logbook of RV Heincke* (hdl:10013/epic.47427).



Sensor Differences

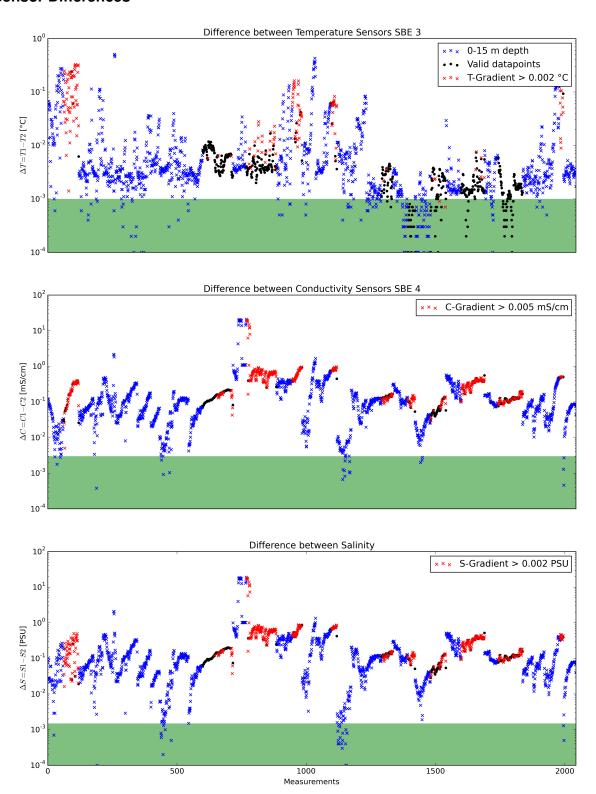


Figure 2: Data accuracy of sensor pairs HE454



6 Results

A complete processing overview for each sensor at each station is summarized in the table in the Appendix (Figure 3).

Double Sensor Check

In Figure 2, the absolute residuals between the two sensorpairs are shown for the measured parameters *Temperature* and *Conductivity* and the derived parameter *Salinity*. Measurements in shallow water depths < 15 m (blue crosses) and gradients between two datapoints exceeding a defined threshold (red crosses) were omitted for accuracy calculation.

	Accuracy	Measurements re-	Remaining measure-
		moved	ments
Parameter	given by manufacturer	Surface 0-15m + gradi-	within accuracy specifi-
		ent filter	cations
Temperature	$\pm 0.001^{\circ}C$	74.11%	16.45%
Conductivity	$\pm 0.003mS/cm$	85.61%	0.00%
Salinity	$\pm 0.0015 PSU$	86.15%	0.00%

Comments

- CTD data acquisition conducted in wrong time format (+1h shift to UTC)
- 29 CTD/RO "on ground" entries in DShip station book
- 29 CTD raw data sets delivered
- 3 casts with each just 3 data points were deleted
- 26 CTD casts processed and uploaded
- of these 26 processed CTD casts:
 - 1 temperature profile deleted (sensor pairs not matching)
 - 1 salinity profile deleted (sensor pairs not matching)
 - 18 oxygen profiles deleted (spiky and not matching to reference casts)
 - 94 data points interpolated
 - 34 data points erased



Result files

Text File (HE454_phys_oce.tab):

The format is a plain text (tab-delimited values) file.

Column separator	Tabulator "\t"
Column 1	Event label
Column 2	Date/Time of event
Column 3	Latitude of event
Column 4	Longitude of event
Column 5	Elevation of event
Column 6	DEPTH, water
Column 7	Pressure, water
Column 8	Temperature, water
Column 9	Conductivity
Column 10	Salinity
Column 11	Temperature, water, potential
Column 12	Density, sigma-theta (0)
Column 13	Oxygen
Column 14	Oxygen, saturation
Column 15	Attenuation, optical beam transmission
Column 16	Fluorometer
Column 17	Number of observations

Processing Report (CTD-HE454-report.pdf):

This PDF document.



									Ţ		Г							en					Π													l
Comments		oxygen deleted		oxygen deleted	oxygen deleted	just 3 data points, cast	deleted	just 3 data points, cast	najajan .	Just 3 data points, cast deleted	_	oxygen deleted	oxygen deleted		T/S sensor pairs with	different values,	temperature and	salinity deleted; oxygen	Oxygen deleted	oxygen deleted	oxygen deleted			oxygen deleted	oxygen deleted		oxygen deleted	oxygen deleted	oxygen deleted	oxygen deleted	oxygen deleted		oxygen deleted		oxygen deleted	
	Offset		~0.5								~0.95			~0.7								~0.6	~0.8			~0.6						~-1.0		~1.9		
Oxygen reference	st. (km)	6	14.77	15.01	38.03						73.68	66.04	.2	∞.				42	1 2	13	37	.92	.45	40.19	18	61	72	58	53	57	2	29.79	51.79	.34	.17	
xygen re	s-cc di	1.9							\dagger		0-1 73	0-1 66	0-1	0-1 76				0-1	0-1 49	6-1 5.4	8-1 8	9-1 14	0-1 21		2-1 9.48	5-1 1.19	12-1 0.7	7-1 4.3	5-1 2.6	.6-1 6.67	7-1 1.5		.7-1 51	1-1	1-1 18	
ľ	cruise/sss-cc dist. (km)	HE404/08-1	HE404/31.1	HE404/30-1	HE404/30-1						HE404/30-1	HE404/30-1	HE404/30-1 53.2	HE404/30-1 76.8				HE404/30-1 63 42	HE404/30-1 49 18	HE404/26-1 5.43	HE404/28-1 8.37	HE404/29-1 14.92	HE404/30-1 21.45	HE404/30-1	HE404/32-1	HE404/35-1	HE404/02-1 0.72	HE370/37-1 4.28	НЕЗ70/25-1 2.63	HE370/16-1	HE370/17-1	HE370/17-1	HE370/17-1	HE404/31-1 14.34	HE404/21-1 18.17	
lete	_	0	9	0	8	•	0	c	1	0	1	0	0	9				C	c		0	2	0	0	4	2	0	0	0	0	0	5	0	0	0	34
complete	interp erased	0	0	0	0		0	C	1	0	0	0	П	16				C	0	0	16	3	∞	10	8	0	4	8	0	4	0	5	9	2	0	94
^			2								1			2																		1				9
Oxy	interp erased						T		Ť				Г	1					Ť	T	T	Γ										1		1		3
'n					2		1		Ī					1																		1				4
Fluor	interp erased						1		Ī					1							4			1	2		1	2		1		1	1	П		15
ns					2									1																		1				4
Trans	interp erased						T		T					1							4			1	2		1	2		1		1	1	1		15
Sal			2		2									1								1			2	1						1				10
Š	interp erased								I				1	8							4	2	9	2	2		1	2		1		1	3	1		37
Temp	interp erased		2		2									1								1			2	1						1				10
Tel	interp								Ī					2							4	1	2	8	2		1	2		1		1	1	1		24
Sensor	pair	7	1	2	2		1		1	1	1	1	1	1				2	1	1	1	1	1	1	1	1	1	2	1	2	1	1	1	1	1	
1454		15-0.*	15-0.*	15-0.*	15-0.*		15-0.*	* 0	٦.	15-0.*		15-0.*	15-0.*	15-0.*				15-0 *	'.I '	15-0.*		15-0.*	15-0.*	20_15-0.*	21_15-0.*	15-0.*	15-0.*		1	15-0.*	15-0.*	15-0.*	15-0.*	15-0.*	15-0.*	
th Eile HA	2	001	600	3 004	005_		900	200	Т	008	т	1 011	012	3 014				013	_			5 018	019			9 022_	1 023_	024_	1 025	3 026_	3 027	028_	3 029	3 032	5 033	
Depth	[m]	E 26.5	'E 13.7	'E 13.8	59.78' E 12.0		E 11.0	-] - -	' E 9.9	E 13.7	E 13.1	' E 16.1	' E 16.8				- F	' F 15 c	' E 38.1	' E 39.2	' E 24.6	' E 14.7	' E 18.7	' E 14.5	' E 18.9	' E 14.1	' E 15.0	E 25.4	' E 23.8	' E 25.8	'E 34.0	' E 36.3	' E 11.8	' E 11.9	
Position	Longitude	8° 0.03' E	8° 15.07' E	7° 59.98	7° 59.78		8° 7.20′ E	30,1700	17.00	8° 12.27' E 9.9	8° 5.93' E	8° 5.36' E	7° 59.98' E 16.1	7° 44.95' E 16.8				7° 52 84' F 13 3	7° 45 11' F 15 5	7° 45.41' E 38.1	7° 29.82	7° 29.62' E 24.6	7° 44.83' E 14.7	7° 30.03' E 18.7	7° 59.80' E 14.5	7° 57.73' E 18.9	7° 58.36' E 14.1	7° 29.97' E 15.0	7° 1.07' E 25.4	6° 45.04' E 23.8	6° 39.86' E	6° 29.83' E	6° 14.87' E 36.3	8° 15.09' E 11.8	8° 16.18' E 11.5	
		-					_		4												N .00							N .26	12' N							
Position	Latitude	54° 7.	7:05 54° 22.50' N	54° 30.	54° 45.50' N		54° 52.42' N		5	55° 1.6	55° 4.5	8:01 55° 0.33' N	54° 53.	55° 7.				55° 0	54° 52	7:34 54° 7.26' N	54° 15.	54° 30.	54° 37.	54° 45.	7:08 54° 14.56' N	53° 56.	53° 56.	53° 49.	53°58.	9:04 53° 56.05' N	54° 0.0	54° 15.	54° 24.	54° 21.	8:37 54° 13.50' N	
Time	_	14:22			11:05		12:46	14.04	14:34	15:36	7:04	8:01	9:14	11:11				13.02	14.19	7:34	9:32	11:26	13:15		7:08	9:25	13:21	15:32	7:08	9:04	11:01	13:27	15:14	7:01		
		05.11.2015 14:22 54° 7.53' N	06.11.2015	06.11.2015	06.11.2015 11:05		06.11.2015	N 100 0 933 N 5. N 1 3100 11 30	11.2013	11.2015	07.11.2015 7:04 55° 4.52' N	07.11.2015	CTD/RO 07.11.2015 9:14 54° 53.99' N	0013-1 CTD/RO 07.11.2015 11:11 55° 7.48' N				07 11 2015 13·02 55° 0 21' N	07 11 2015 14·19 54° 52 56' N	CTD/RO 08.11.2015	0017-1 CTD/RO 08.11.2015 9:32 54° 15.00' N 7° 29.82' E 39.2	0018-1 CTD/RO 08.11.2015 11:26 54° 30.06' N	CTD/RO 08.11.2015 13:15 54° 37.49' N	08.11.2015 14:59 54° 45.02' N	09.11.2015	09.11.2015 9:25 53° 56.83' N	CTD/RO 11.11.2015 13:21 53° 56.22' N	0024-1 CTD/RO 11.11.2015 15:32 53° 49.97' N	CTD/RO 12.11.2015 7:08 53° 58.12' N	12.11.2015	12.11.2015 11:01 54° 0.07' N	11.2015	12.11.2015 15:14 54° 24.04' N	CTD/RO 15.11.2015 7:01 54° 21.59' N	CTD/RO 15.11.2015	
Date					-		_		_				0 07.1	0 07.1						0 08.1	0 08.1	0 08.1	0 08.1		0 09.1	0 09.1	0 11.1	0 11.1	0 12.1	0 12.1				0 15.1	0 15.1	
Gear	Abbr.	CTD/RO	CTD/RO	CTD/RO	CTD/RO		CTD/RO	Ca/ GT		CTD/RO		CTD/RO	CTD/R	CTD/R				CTD/RO	CTD/RO	CTD/R	CTD/R	CTD/R	CTD/R	CTD/RO	CTD/RO	CTD/RO	CTD/R	CTD/R	CTD/R	CTD/RO	CTD/RO	CTD/RO	CTD/RO	CTD/R		
Station	HE454/	0001-1	0003-1	0004-1	0005-1		0006-1	1 2000	7-7000	0008-1	0010-1	0011-1	0012-1	0013-1				0014-1	0015-1	0016-1	0017-1	0018-1	0019-1	0020-1	0021-1	0022-1	0023-1	0024-1	0026-1	0027-1	0028-1	0029-1	0030-1	0032-1	0033-1	

Figure 3: CTD data Processing Summary HE454 Page 7 of 8



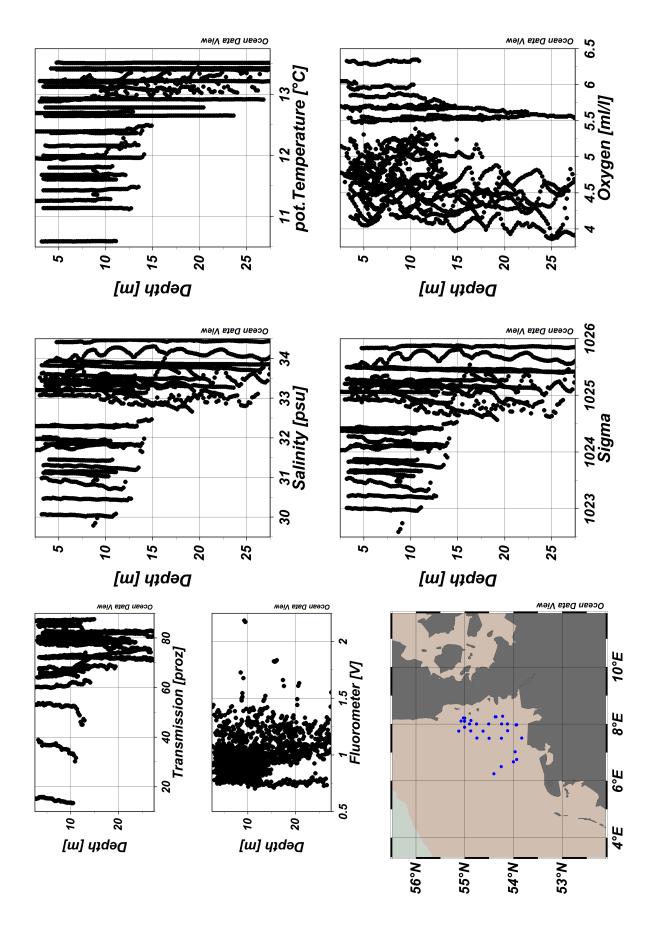


Figure 4: ODV Screenshot of HE454 CTD data Page 8 of 8