



Surface T/S Data RV "Heincke" HE382/1

Data Processing Report

Contents

1	Introduction	1
2	Workflow	1
3	Cruise details	2
4	Sensor	2
5	Processing Report	3

Contact: Gerd Rohardt Alfred-Wegener-Institute Am Handelshafen 12, D-27570 Bremerhaven, GERMANY Mail: info@awi.de

Processing Agency: FIELAX Schleusenstr. 14, D-27568 Bremerhaven, GERMANY Mail: info@fielax.de

Ref.: HE382_1_TSG.pdf	Vers.: 1	Date: 2016/04/11	Status: final	
-----------------------	----------	------------------	---------------	--



1 Introduction

This report describes the processing of raw data acquired by the thermosalinograph on board RV "Heincke" during expedition HE382/1 to receive cleaned up and drift corrected salinity data.

2 Workflow

The different steps of processing are visualized in Figure 2. Unvalidated data of sensor, internal and external temperature are extracted from the DAVIS SHIP data base (https://dship.awi.de) in a 1-second interval for cruises from 2009 to 2014. The Salinity was calculated by applying the Practical Salinity Scale 1978 (PSS-78). Furthermore the sound velocity was derived by using the Del Grosso equation.

As first step, a basic cleanup was performed to remove missing or flagged data. Since the salinity measurements in coastal areas (e.g. rivers and ports) are less reliable, measurements in a buffer of 2 nautical miles (NM)along the coast are filtered. In the norwegian area (fjords) the buffer is set to 200 meters (0.108 NM). After the exclusion of data outside the speed interval of 0.5 kn to 15 kn, the salinity is driftcorrected with lab calibration data. In the next processing step the difference between the external and internal temperature is taken to identify an unproper usage of the thermosalinograph. This filter is ignored if more than 90% of the data would get removed. After despiking, a visual screening is performed to enhance the data quality. In the last step the temporal resolution is reduced to 5-minutes-means.

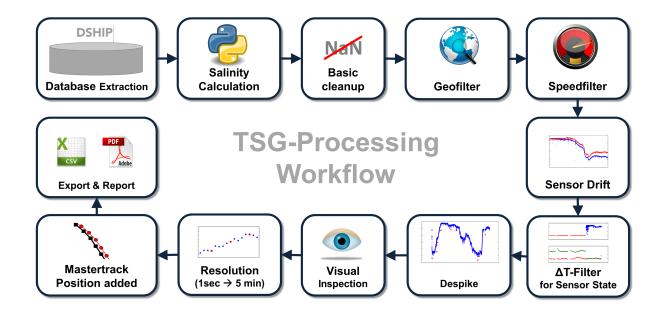


Figure 1: Workflow of TSG data processing



3 Cruise details

Vessel name	RV "Heincke"
Cruise name	HE382/1
Cruise start	15.06.2012 Bremerhaven
Cruise end	20.06.2012 Cuxhaven
Cruise duration	5 days

4 Sensor

Thermosalinograph:Seabird SEACAT SBE21 (SN: 3334)External Temperature:SBE38

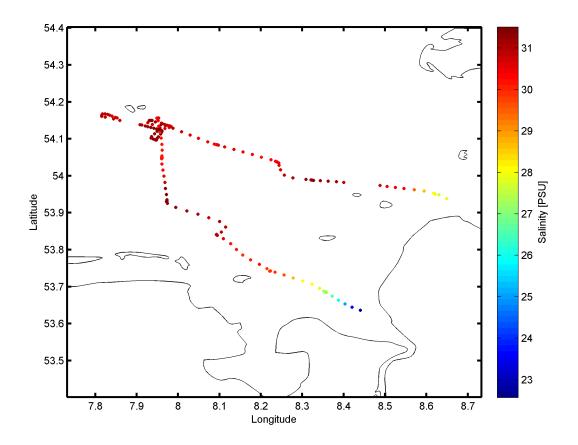


Figure 2: Cruisemap of HE382/1.



5 Processing Report

Database Extraction

Data source DSHIP database (dship.awi.de)	
Exported values	259201
First dataset	2012-06-15T00:00:03 UTC
Last dataset	2012-06-18T00:00:00 UTC

Automatic Validation

The following thresholds were applied for the automatic flagging of the position data:

Min. speed	Minimum 0.5 kn between two datapoints.	
Max. speed	Maximum 15 kn between two datapoints.	
GeoBuffer	GeoBuffer 0.1080 NM around Norway, 2 NM anywhere else	
Temperature Maximum T-difference of 5 K.		

Flagging result

Filter	Data left (abs.)	Data left (rel.)	Data removed (abs.)	Data removed (rel.)
Raw data	259201	100 %	—	_
Basic	258624	99.78%	577	0.22 %
Geo	53859	20.78%	205342	79.22 %
Speed	49144	18.96 %	210057	81.04 %
Temperature	49144	18.96%	210057	81.04 %
Despike	41666	16.07 %	217535	83.93 %
Manual	41666	16.07%	217535	83.93 %
5-min-Mean	176	0.07%	259025	99.93 %

Sensordrift

Last calibration	20.12.2008
Current calibration	12.01.2013
Start of deployment	02.05.2011
End of deployment	11.12.2012
Scaled drift	-1.9400e-002 [PSU/month]
Minimal offset	2.6170e-001 [PSU]
Maximal offset	2.6309e-001 [PSU]

Process evolution

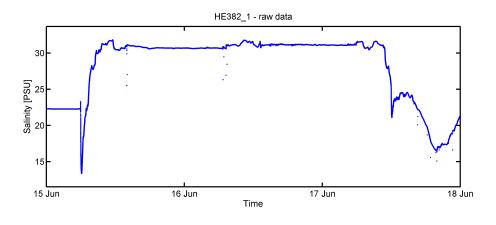


Figure 3: Raw salinity data.

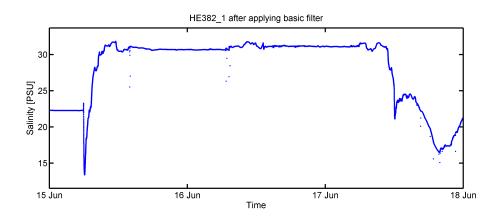


Figure 4: Salinity after basic filter.

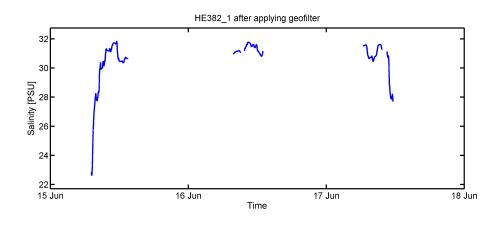


Figure 5: Salinity after geofilter.

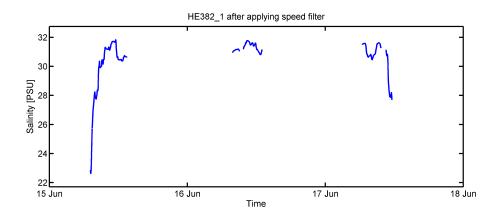


Figure 6: Salinity after speed filter.

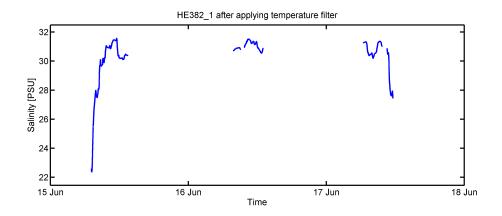


Figure 7: Salinity after temperature filter.

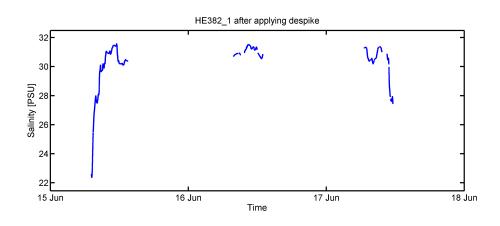


Figure 8: Salinity after despike.

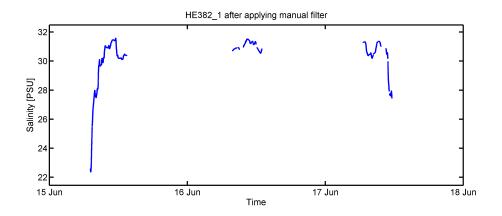


Figure 9: Salinity after manual filter.

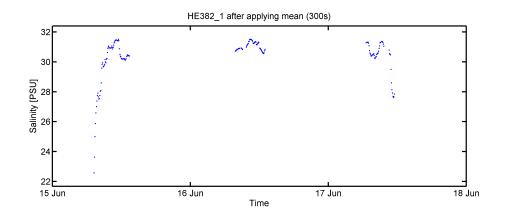


Figure 10: Salinity in 5-min-mean values.



Result file

Text File (HE382_1_surf_oce.tab):

The format is a plain text (tab-delimited values) file.

Column separator	Tabulator "\t"
Column 1	Date and time expressed according to ISO 8601
Column 3	Latitude in decimal format, unit degree
Column 4	Longitude in decimal format, unit degree
Column 5	Depth below water surface, unit meter
Column 6	Temperature, unit degree
Column 7	Salinity, unit PSU

Processing Report (HE382_1_TSG.pdf): This PDF document.