



Surface T/S Data RV "Heincke" HE463

Data Processing Report

Contents

1	Introduction	1
2	Workflow	1
3	Cruise details	2
4	Sensor	2
5	Processing Report	3

Contact: Gerd Rohardt Alfred-Wegener-Institute Am Handelshafen 12, D-27570 Bremerhaven, GERMANY Mail: info@awi.de

Processing Agency: FIELAX Schleusenstr. 14, D-27568 Bremerhaven, GERMANY Mail: info@fielax.de

Ref.: HE463_TSG.pdf	Vers.: 1	Date: 2017/03/02	Status: final



1 Introduction

This report describes the processing of raw data acquired by the thermosalinograph on board RV "Heincke" during expedition HE463 to receive cleaned up and drift corrected salinity data.

2 Workflow

The different steps of processing are visualized in Figure 1. Unvalidated data of sensor, internal and external temperature are extracted from the DAVIS SHIP data base (https://dship.awi.de) in a 1-second interval. The Salinity was calculated by applying the Practical Salinity Scale 1978 (PSS-78). Furthermore the sound velocity was derived by using the Del Grosso equation.

As first step, a basic cleanup was performed to remove missing or flagged data. Since the salinity measurements in coastal areas (e.g. rivers and ports) are less reliable, measurements in a buffer of 2 nautical miles (NM) along the coast are filtered. In the norwegian area (fjords) the buffer is set to 200 meters (0.108 NM). After the exclusion of data outside the speed interval of 0.5 kn to 15 kn, the salinity is driftcorrected with lab calibration data. In the next processing step the difference between the external and internal temperature is taken to identify an unproper usage of the thermosalino-graph. This filter is ignored if more than 90% of the data would get removed. After despiking, a visual screening is performed to enhance the data quality. In the last step the temporal resolution is reduced to 5-minutes-means.

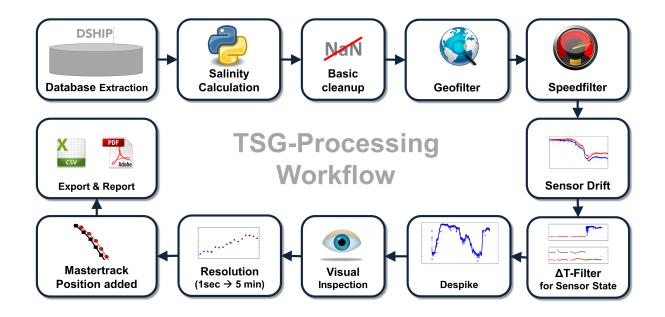


Figure 1: Workflow of TSG data processing



3 Cruise details

Vessel name	RV "Heincke"
Cruise name	HE463
Cruise start	11.05.2016 Bremerhaven
Cruise end	27.05.2016 Bremerhaven
Cruise duration	17 days

4 Sensor

Thermosalinograph:Seabird SEACAT SBE21 (SN: 3334)External Temperature:SBE38

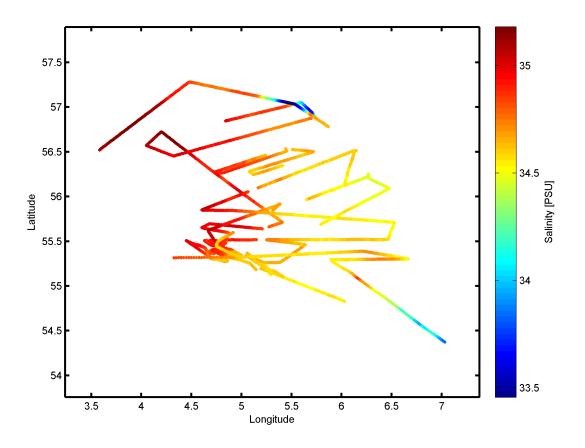


Figure 2: Cruisemap of HE463.



5 Processing Report

Database Extraction

Data source	DSHIP database (dship.awi.de)
Exported values	1468801
First dataset	2016-05-11T00:00:00 UTC
Last dataset	2016-05-28T00:00:00 UTC

Automatic Validation

The following thresholds were applied for the automatic flagging of the position data:

Min. speed Minimum 0.5 kn between two datapoints.	
Max. speed	Maximum 15 kn between two datapoints.
GeoBuffer 0.1080 NM around Norway, 2 NM anywhere else	
Temperature Maximum T-difference of 5 K.	

Flagging result

Filter	Data left (abs.)	Data left (rel.)	Data removed (abs.)	Data removed (rel.)
Raw data	1468801	100 %	—	—
Basic	1417655	96.52%	51146	3.48 %
Geo	1343023	91.44%	125778	8.56 %
Speed	1314251	89.48%	154550	10.52 %
Temperature	1269120	86.41 %	199681	13.59 %
Despike	1268523	86.36%	200278	13.64 %
Manual	995487	67.78%	473314	32.22 %
5-min-Mean	3400	0.23%	1465401	99.77 %

Sensordrift

Last calibration	19.05.2015
Current calibration	15.12.2016
Start of deployment	09.05.2016
End of deployment	02.12.2016
Scaled drift	-2.1650e-004 [PSU/month]
Minimal offset	1.4236e-005 [PSU]
Maximal offset	1.3524e-004 [PSU]

Comments

—



Process evolution

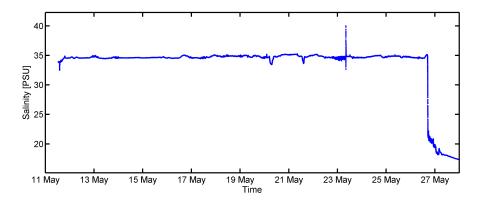


Figure 3: Raw salinity data.

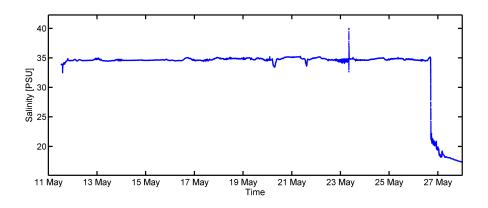


Figure 4: Salinity after basic filter.

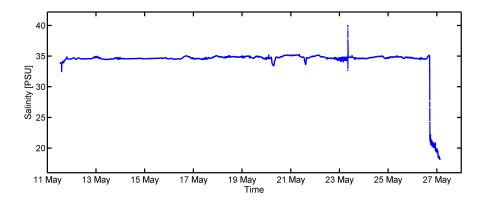


Figure 5: Salinity after geofilter.

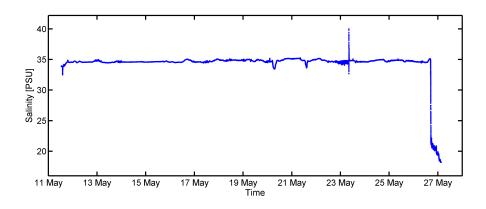


Figure 6: Salinity after speed filter.

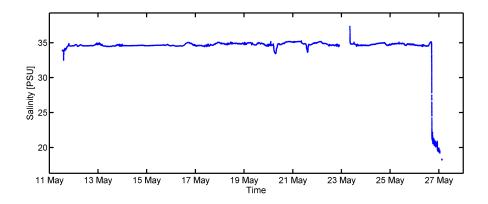


Figure 7: Salinity after temperature filter.

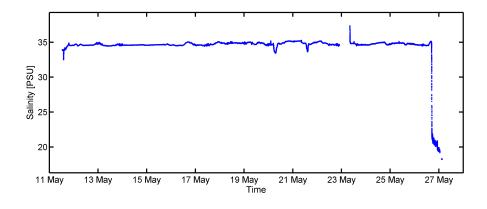


Figure 8: Salinity after despike.

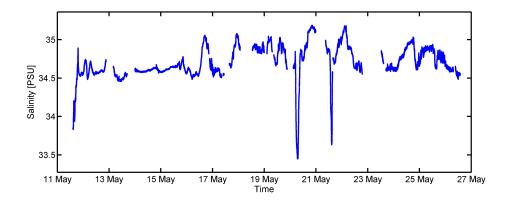


Figure 9: Salinity after manual filter.

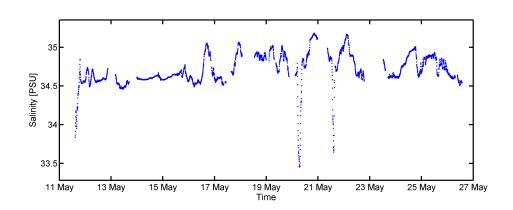


Figure 10: Salinity in 5-min-mean values.



Result file

Text File (HE463_surf_oce.tab):

The format is a plain text (tab-delimited values) file.

Column separator	Tabulator "\t"
Column 1	Date and time expressed according to ISO 8601
Column 2	Latitude in decimal format, unit degree
Column 3	Longitude in decimal format, unit degree
Column 4	Depth below water surface, unit meter
Column 5	Temperature, unit degree
Column 6	Salinity, unit PSU

Processing Report (HE463_TSG.pdf): This PDF document.